



Moso[®] Tambour

Product


MOSO Tambour is bamboo in a flexible form, often applied to cover a carrier panel (i.e. MDF). In this case the bamboo strips have not been pressed together, but have been connected in an alternative, flexible way. There are 3 possibilities: in the MOSO 'Tatamat' the bamboo strips have been connected by using a weaving thread. In the MOSO 'Panda' the strips have been connected by means of tape on the back side (also no weaving thread visible). A variety to this version is the MOSO 'ZEN', using extra wide bamboo strips (50mm) which are created by pressing bamboo veneer (double sided) on a HDF core. All MOSO Tambour products have a fabric backing.



Tatamat



Panda

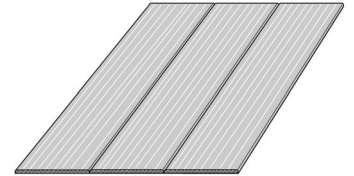

Zen

Product line

Code Natural	Code Caramel	Style	Strip size (mm)	Finish	Backing	Roll Dim. (m)*
MTNF5-204-**	MTCF5-204-**	Tatamat	2x5	- / L / SL	Fabric	2,04x45
MPNF3.5-204-**	MPCF3.5-204-**	Panda	2x3.5	- / L / SL	Fabric	2,04x45
MPNF3.5-244-21	MPCF3.5-244-21	Panda	2x3.5	-	Fabric	2,44x30
MPNF7-204-**	MPCF7-204-**	Panda	2x7	- / L / SL	Fabric	2,04x45
	MPCFA15-204-**	Panda	2x15	- / L / SL	Fabric	2,04x45
MPNF17-125-**	MPCF17-125-**	Panda	2x17	- / L / SL	Fabric	1,25x45
MPNF17-204-**	MPCF17-204-**	Panda	2x17	- / L / SL	Fabric	2,04x45
MPNF17-244-21	MPCF17-244-21	Panda	2x17	-	Fabric	2,44x30
MZNF50-204-**	MZCF50-204-**	Zen	3x50	- / L / SL	Fabric	2,04x30
	MZCF50-204-**HF	Zen	4.2x50	- / L / SL	Fabric	2,04x15
	MZCF50-244-21HF	Zen	4.2x50	-	Fabric	2,44x15

L = Lacquer
SL = Stained Lacquer

*) Alternative widths: 140cm or 160 cm.

***) The last 2 positions of the product code represent the finish:

21=unfinished, 22=lacquered. In addition, the following colours are available:

01=White, 11=Black, 12=Elephant, 25=Mahogany, 40=Blue, 60=Taupe, 65=Blossom, 70=Colonial, 75=Chestnut

Application (summary)

- Common carrier panels: MDF, chipboard, multiplex.
- Pressing: use a suitable glue (PVAC, cold pressed). Use a suitable material (for example veneer) to cover the other side of the panel, to prevent bending of the panel.

Technical characteristics

- Hardness: 3,5 kg/mm² (Brinell)
- Shrink/swell: 0,14% per 1% change in moisture content
- Equilibrium MC: 10% at 20 °C and 65% Rel. Air Humidity
8% at 20 °C and 50% Rel. Air Humidity
- Density: 700 kg/m³ (HDF of the ZEN version: 800 kg/m³)
- Emission formaldehyde: <0,124 mg/m³ (E1 norm)



www.moso.eu