



MOSO® Bamboo X-treme® fascia/trim board

MOSO® Bamboo X-treme® fascia/trim boards are solid, Thermo-Density® boards, made from compressed bamboo strips. A special, heat-treatment process at 392°F (200°C) provides MOSO® Bamboo X-treme® the highest durability class possible in the appropriate European standard (see technical characteristics below) and increases the hardness and stability. These products are used in a variety of applications such as trim or skirt boards and other applications where a wider board is desired.

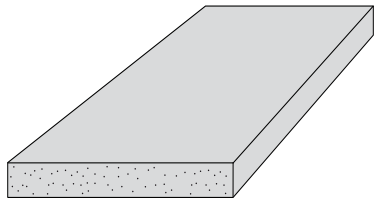

UF: Unfinished
Also available with FSC® certification.

| Product Code | Material | Finish | Surface | Size | Dimensions (") | Dimensions (mm) |
|--------------|------------------------|--------|---------|------------|--------------------|-----------------|
| BO-LUM20-205 | Thermo Density® bamboo | UF | Smooth | 1 x 8 x 6 | 3/4 x 8 x 73-1/4 | 20 x 205 x 1860 |
| BO-LUM20-305 | Thermo Density® bamboo | UF | Smooth | 1 x 12 x 6 | 3/4 x 12 x 73-1/4 | 20 x 305 x 1860 |
| BO-LUM40-152 | Thermo Density® bamboo | UF | Smooth | 2 x 6 x 6 | 1-1/2 x 6 x 73-1/4 | 40 x 152 x 1860 |

technical characteristics and certifications

- Density: +/- 71.79 lbs/ft³
- Dimensional stability:
length: + 0.1%; width + 0.9% (24 hours in water 68°F)
- Resistance to Indentation - Brinell Hardness: ≥ 65.5 psi (EN 1534)
- Reaction to fire: Class B-s1-d0 (EN 13501-1)
- Flame spread index: Flame spread 25, Smoke developed 45
Class A (ASTM E84) / CAN/ULC S102 (WUI approved)
- Thermal emittance: 0.81 (ASTM C1371)*
- Solar Reflectance (SR): 32 (ASTM C1549)*
- Solar Reflectance Index (SRI): Low 27, Medium 30, High 33 (ASTM E1980)*
- Modulus of Elasticity: 13565 MPa (EN 408, equivalent ASTM D 198)
- Breaking strength: 54.4 MPa (EN 408, equivalent ASTM D 198)
- Biological durability:
Class 1 (EN 350 / CEN/TS 15083-2), simulated graveyard test
Class 1 (EN 350 / CEN/TS 15083-1)
- Effectiveness against Blue Stain: Class 0 (EN 152)
- Use Class: Class 4 (EN 335)
- CO2 neutral: LCA report TU Delft (ISO 14040/44) (www.moso.eu/lca)
- Environmental Product Declaration - EPD (EN 15804) (www.moso.eu/epd)
- FSC®: Products available with FSC® certification on request.
- Contribution LEED BD+C - v4: MR 1, MR 2, MR 3 (FSC®)
v2009: MR 6, MR 7 (FSC®)
- Contribution BREEAM: MAT 1, MAT 3 (FSC®), MAT 5 (HD)
- Warranty: 25 years

*) Tested on 3 years weathered MOSO® Bamboo X-treme®



The mark for responsible forestry
FSC® C002063
www.fsc.org
Only the products defined as such,
are FSC certified



breeam