


MOSO® Purebamboo (solid strip)

MOSO® Purebamboo is made entirely of solid bamboo, either with strips pressed together horizontally (Plain Pressed), vertically (Side Pressed) or compressed (High Density®). This floor type is a good solution when an economical but high performance bamboo floor is required. Purebamboo (in Plain Pressed version) was the first bamboo floor ever – all other bamboo floors have been derived from this classic version. The boards BF-DS210 and BF-DS260 are longer and wider and equipped with a click system for easy installation.

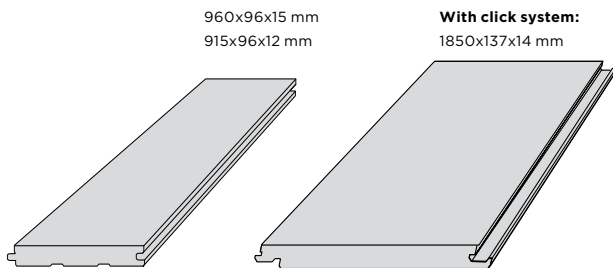

L: Lacquered Treffert 80 g/m².
*) Top layer 6 mm.

Natural	Caramel	Connection	Style	Finish	Edges	Dimensions (mm)	Box Content (pcs.)	Box Content (m²)
	BF-LA560	Tongue/Groove	Side Pressed	-	Square Edge	960x96x15*	24	2.212
BF-LA610	BF-LA660	Tongue/Groove	Side Pressed	L	Micro Bevel	960x96x15*	24	2.212
BF-LA810	BF-LA860	Tongue/Groove	Plain Pressed	L	Micro Bevel	960x96x15	24	2.212
BF-DS110	BF-DS160	Tongue/Groove	High Density®	L	Micro Bevel	915x96x12	24	2.108
BF-DS210	BF-DS260	Click	High Density®	L	Micro Bevel	1850x137x14	6	1,521

installation summary

- Check room climate conditions (room temp. 18-21°C, air humidity 40-65%).
- Check subfloor: this should be flat/clean/stable and should not exceed the maximum allowed moisture content (for example 1.8% for sand cement).
- The floor should be fully glued and can also be installed floating (max width 5 m, max length 12 m, using expansion gaps).
- For floating installation use a PVAC wood adhesive to join the tongue and groove together.
- Elastic adhesive systems like 1-component Polyurethane or silan type of adhesives only can be used, when:
 - Shear strength $T_s > 1.4 \text{ N/mm}^2$
(3 days balanced at 23 degrees Celsius/50% Air Humidity)
 - Shear elongation $\gamma > 0.5$
(3 days balanced at 23 degrees Celsius/50% Air Humidity)
 Please ask your glue supplier for more information.
- This floor type can be installed – under certain conditions – on floor heating / cooling.
 - ▶ www.moso-bamboo.com/floorheating-cooling
- After installation: make sure proper cleaning and maintenance is done, fitting to the chosen finish. For oiled finish: the floor has to be re-oiled after installation. Polish the oil with a red pad or patina disc (possibly afterwards with white pad).

If the floor is equipped with a click system:

- The floor should be installed floating (max width 8 m, max length 12 m, using expansion gaps) but can also be fully glued to the subfloor (Only with PU glue.)
- You can install the floor without using glue.

- Full version available at ▶ www.moso-bamboo.com/purebamboo

technical characteristics and certifications

- Density (Product): +/- 700 kg/m³ (SP/PP), +/- 1050 kg/m³ (HD)
- Top layer thickness / Wear layer: approx. 5 mm (PP), approx. 6 mm (SP), approx. 3 mm (HD 12 mm), approx. 4 mm (HD 14 mm)
- Shrink/Swell bamboo: 0.14% per 1% change in Moisture Content (SP/PP)
- Equilibrium MC: 10% at 20°C and 65% rel. Air Humidity (SP/PP)
8% at 20°C and 50% rel. Air Humidity (SP/PP)
- Resistance to Indentation - Brinell Hardness: $\geq 4 \text{ kg/mm}^2$ (SP/PP), $\geq 9.5 \text{ kg/mm}^2$ (HD) (EN 1534)
- Reaction to fire: Class Cfl-s1 (EN 13501-1)
- Formaldehyde emission: Class E1 ($< 0.124 \text{ mg/m}^3$, EN 717-1), Class E0 ($< 0.025 \text{ mg/m}^3$)¹⁾ (HD)
- Slip resistance²⁾: USRV 31 (CEN/TS 15676) / R 10 (DIN 51130)
- Thermal conductivity: 0.17 W/mK (SP/PP), 0.26 W/mK (HD) (EN 12667)
- Thermal resistance: 0.0882 m²K/W (SP/PP), 0.0471 m²K/W (HD 12 mm), 0.0549 m²K/W (HD 14 mm) (EN 12667)
- Use Class: Class 1 (EN 335)
- Critical radiant flux: Class 1 (ASTM E 648) (not tested for HD with click system)
- CO₂ neutral: LCA report TU Delft (ISO 14040/44) (moso-bamboo.com/lca)
- Environmental Product Declaration - EPD (EN 15804) (moso-bamboo.com/epd)
- FSC®: Products available with FSC® certification on request.
- Contribution LEED BD+C - v4: MR 1, MR 2, MR 3 (FSC®), EQ2 v2009: MR 6, MR 7 (FSC®), IEQ 4.3
- Contribution BREEAM: HEA 2, MAT 1, MAT 3 (FSC®), MAT 5 (HD)
- Guarantee: 30 years

¹⁾ E0 Class is an unofficial formaldehyde emission class, but it is commonly used to indicate that the product has a very low emission, not detectable (n.d.) emission or is produced with No Added Formaldehyde (NAF) glues. E0 products automatically qualify for the official E1 Class according to EN 717-1.
²⁾ Only for lacquered versions.



bream



The mark of responsible forestry
FSC® C002063