



# MOSO® Bamboo X-treme® Fencing

MOSO® Bamboo X-treme® Fence boards are solid, Thermo-Density® exterior boards, made from compressed bamboo strips. A special, unique heat-treatment process at 200°C provides MOSO® Bamboo X-treme® with the highest durability class possible in the appropriate EU norms (see technical characteristics below) and the compression increases the hardness and stability. The fence boards, equipped with a tongue/groove connection, are mounted between posts with U-profiles (not provided by MOSO®). Like any untreated tropical hardwood species, when exposed to outdoor conditions, MOSO® Bamboo X-treme® will turn grey over time creating a very natural look.

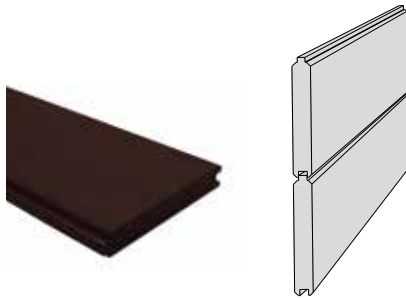

Product Code	Edge groove	Finish	Surface	Length edges	End edges	End-matched	Effective width (mm)	Dimensions (mm)
BO-DTHT301TG	Tongue/Groove	Woca	Flat	2 mm x 45°	1 mm x 45°	No	131	1800x137x20

## Recommendation:

MOSO® Bamboo X-treme® Cladding profiles are also very suitable for making a fence. For example, consider installing the MOSO® Bamboo X-treme® Triple Rhombus profile vertically. ► [www.moso-bamboo.com/rhombus](http://www.moso-bamboo.com/rhombus).



## Technical characteristics and certifications

- Density: ± 1150 kg/m<sup>3</sup>
- Dimensional stability: length: + 0,1 %; width + 0,9% (24 hours in water 20°C)
- Resistance to Indentation - Brinell Hardness: ± 9.5 kg/mm<sup>2</sup> (average value - EN 15334)
- Reaction to fire: Class B-s1-d0<sup>1)</sup> (EN 13501-1)
- Flame spread index: Class A (ASTM E84)
- Thermal emittance: 0.81 (ASTM C1371)<sup>2)</sup>
- Solar Reflectance (SR): 0.32 (ASTM C1549)<sup>2)</sup>
- Solar Reflectance Index (SRI): Low 27, Medium 30, High 33 (ASTM E1980)<sup>2)</sup>
- Modulus of Elasticity: 17366 N/mm<sup>2</sup> (20 mm), 15986 N/mm<sup>2</sup> (40 mm) (mean value - EN 408)
- Bending strength: 84.4 N/mm<sup>2</sup> (20 mm), 57.3 N/mm<sup>2</sup> (40 mm) (characteristic value - EN 408)
- Biological durability: Class 1 (EN 350 / CEN/TS 15083-2), simulated graveyard test Class 1 (EN 350 / CEN/TS 15083-1)
- Effectiveness against Blue Stain: Class 0 (EN 152)
- Effectiveness against European Termites: Class M (EN 350 / EN 117 - Coptotermes gestroi)
- Durability against larvae: Durable (EN 350 / EN 49-2)
- Use Class: Class 4 (EN 335)
- Environmental Product Declaration - EPD (EN 15804) ([www.moso-bamboo.com/epd](http://www.moso-bamboo.com/epd))
- FSC®: Products available with FSC® certification on request.
- Contribution LEED BD+C - v4: MR 1, MR 2, MR 3 (FSC®), SS 7 v2009: MR 6, MR 7 (FSC®)
- Contribution BREEAM: MAT 1, MAT 3 (FSC®), MAT 5 (HD)
- Guarantee: 25 years

<sup>1)</sup> Tested on 18 mm thickness, without gaps between boards, with ventilation space behind boards.  
<sup>2)</sup> Tested on 3 years weathered MOSO® Bamboo X-treme®.



Also available with FSC® certification.



breeam

Profile drawings available here ► [www.moso-bamboo.com/outdoor-profile-drawings](http://www.moso-bamboo.com/outdoor-profile-drawings)

