



MOSO® Bamboo X-treme® Fencing

MOSO® Bamboo X-treme® fence boards are solid, Thermo-Density® exterior boards, made from compressed bamboo strips. A special, unique heat-treatment process at 200°C provides MOSO® Bamboo X-treme® with the highest durability class possible in the appropriate EU norms and increases the stability and density. The fence boards, equipped with a tongue/groove connection, are mounted between posts with U-profiles (not provided by MOSO®). Like any untreated tropical hardwood species, when exposed to outdoor conditions, MOSO® Bamboo X-treme® will turn grey over time creating a very natural look.

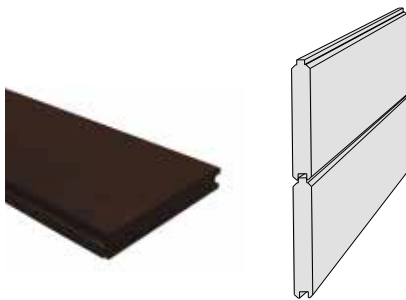

*) Also on ends.


Product Code	Edge groove	Finish	Edges*	Surface	End-matched	Effective width (mm)	Dimensions (mm)
BO-DTHT301TG	Tongue/Groove	Woca	Bevel	Flat	No	131	1800x137x20

technical characteristics and certifications

- Density: +/- 1150 kg/m³
- Dimensional stability:
length: + 0,1 %; width + 0,9% (24 hours in water 20°C)
- Resistance to Indentation - Brinell Hardness: ≥ 9.5 kg/mm² (EN 1534)
- Reaction to fire: Class B-s1-d0 ¹⁾ (EN 13501-1)
- Flame spread index: Class A (ASTM E84)
- Thermal emittance: 0.81 (ASTM C1371) ²⁾
- Solar Reflectance (SR): 0.32 (ASTM C1549) ²⁾
- Solar Reflectance Index (SRI): Low 27, Medium 30, High 33 (ASTM E1980) ²⁾
- Modulus of Elasticity: 13565 N/mm² (mean value - EN 408)
- Bending strength: 54.4 N/mm² (characteristic value - EN 408)
- Biological durability:
Class 1 (EN 350 / CEN/TS 15083-2), simulated graveyard test
Class 1 (EN 350 / CEN/TS 15083-1)
- Effectiveness against Blue Stain: Class 0 (EN 152)
- Use Class: Class 4 (EN 335)
- CO₂ neutral: LCA report TU Delft (ISO 14040/44) (www.moso-bamboo.com/lca)
- Environmental Product Declaration - EPD (EN 15804) (www.moso-bamboo.com/epd)
- FSC®: Products available with FSC® certification on request.
- Contribution LEED BD+C - v4: MR 1, MR 2, MR 3 (FSC®), SS 7 v2009: MR 6, MR 7 (FSC®)
- Contribution BREEAM: MAT 1, MAT 3 (FSC®), MAT 5 (HD)
- Guarantee: 25 years

¹⁾ Tested on 18 mm thickness, without gaps between boards, with ventilation space behind boards.

²⁾ Tested on 3 years weathered MOSO® Bamboo X-treme®.

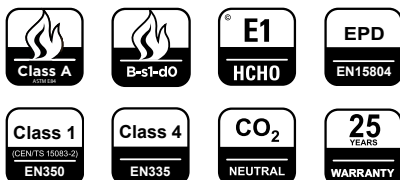

The mark of responsible forestry
FSC® C002063



breeam