
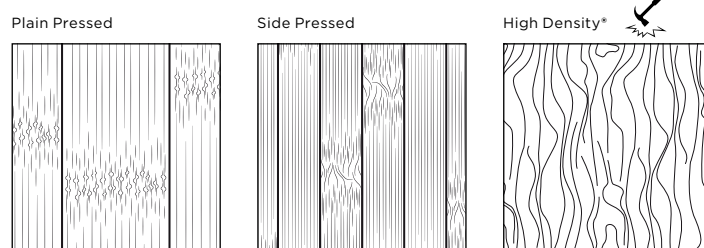


MOSO® bamboo solid panels

The MOSO® Bamboo Solid Panel consists of multiple layers of bamboo, available in many variations with respect to size, thickness, configuration, style and colour. These bamboo panels are especially interesting in those applications where the side of the panel remains visible, such as steps of a staircase, furniture and kitchen work tops.



PP: Plain Pressed, SP: Side Pressed, HD: High Density* (outer layers). *) Mix of natural and caramel strips, **) High Density* outer layers fingerjointed in length.

Natural	Caramel	Tiger*	Style	Thickness (mm)	Construction (mm)	Dimensions (mm)
BP-MP1230	BP-MP1280		PP	16	3.5-9-3.5	2440x1220
BP-MP1210	BP-MP1260		PP	20	4-12-4	2440x1220
BP-5P131	BP-5P181		PP	20	5x4	2440x1220
BP-MP1215	BP-MP1265		PP	25	4-17-4	2440x1220
BP-MP1240	BP-MP1290		PP	30	5-20-5	2440x1220
BP-5P105	BP-5P155		PP	40	4-8-16-8-4	2440x1220
BP-5P140	BP-5P190		PP	40	4-6-20-6-4	3000x700
BP-5P145	BP-5P195		PP	40	4-6-20-6-4	4000x620
BP-MP400	BP-MP450		SP	7	2-3-2	2440x1220
BP-MP1430	BP-MP1480		SP	16	3.5-9-3.5	2440x1220
BP-SP800	BP-SP850		SP	19	1x19	2440x1220
BP-MP1410	BP-MP1460		SP	20	4-12-4	2440x1220
BP-MP1415	BP-MP1465		SP	25	4-17-4	2440x1220
BP-MP1440	BP-MP1490		SP	30	5-20-5	2440x1220
BP-5P205	BP-5P255		SP	40	4-8-16-8-4	2440x1220
BP-5P240	BP-5P290		SP	40	4-6-20-6-4	3000x700
BP-5P245	BP-5P295		SP	40	4-6-20-6-4	4000x620
BP-DT1000	BP-DT1050	BP-DT1050-NP	HD	20	4-12-4	2440x1220
BP-DT5000	BP-DT5050		HD	38	3-6-20-6-3	2440x1220
	BP-DT6050**		HD	38	3-6-20-6-3	3100x700
	BF-DT6060**		HD	38	3-6-20-6-3	4000x700

processing instructions summary

(full version available on www.moso.eu/solid-panel)

- Advised room conditions: temperature approx. 21°C. Air humidity 40-65%.
- The MOSO® 1-ply panels and MOSO® solid multilayer panels are oversized in length and width and are not calibrated (fine sanded).
- The MOSO® 1-ply panels and MOSO® solid multilayer panels have an A- and B-side. The backside (B) generally contains more colour variation than the surface side (A) and can show small seams between the strips. The backside is marked with a pencil line or sticker.
- The inner layers of MOSO® solid (multi-layer) panels consist of multiple, separated cross segments, which create some small voids in these layers. This construction optimizes the stability of the panels. The voids have to be filled during processing.
- The surface of the solid High Density* panels may contain small seams and open pores. Depending on the finishing- and customer requirements, the surface can be closed using a (colour matching) filler.

technical characteristics and certifications

- Density (Toplayer): +/- 700 kg/m³ (SP/PP), +/- 1050 kg/m³ (HD)
- Top layer thickness / Wear layer: 3,5-5 mm¹⁾ (SP/PP), 3-4 mm¹⁾ (HD)
- Shrink/Swell bamboo: 0.14% per 1% change in Moisture Content (SP/PP)
- Equilibrium MC: 10% at 20°C and 65% rel. Air Humidity (SP/PP)
- 8% at 20°C and 50% rel. Air Humidity (SP/PP)
- Resistance to Indentation - Brinell Hardness: ≥ 4 kg/mm² (SP/PP), ≥ 9.5 kg/mm² (HD) (EN 1534)
- Reaction to fire: Class D-s1-d0²⁾ (SP/PP) (EN 13501-1)
- Formaldehyde emission: Class E1 (< 0.124 mg/m³, EN 717-1) / Class E0 (< 0.025 mg/m³)³⁾
- Modulus of Elasticity: 4530 N/mm² (40mm)⁴⁾ (mean value - EN 789)
- Glue: D3 water resistant
- CO₂ neutral: LCA report TU Delft (ISO 14040/44) (www.moso.eu/lca)
- Environmental Product Declaration - EPD (EN 15804) (www.moso.eu/epd)
- FSC®: Products available with FSC® certification on request.
- Contribution LEED BD+C - v4: MR 1, MR 2, MR 3 (FSC®), EQ2 v2009: MR 6, MR 7 (FSC®), IEQ 4.4 (if requested as EO)
- Contribution BREEAM: HEA 2, MAT 1, MAT 3 (FSC®), MAT 5 (HD)

¹⁾ Depending on thickness version.

²⁾ For 40mm version.

³⁾ Available on request - E0 class is an unofficial formaldehyde emission class, but it is commonly used to indicate that the product is produced with No Added Formaldehyde (NAF) glues. E0 products automatically qualify for the official E1 class according EN 717-1.

⁴⁾ Modulus of Elasticity of other panels available on request.



breem