


MOSO® Bamboo X-treme® Outdoor Cladding

MOSO® Bamboo X-treme® Cladding is a solid, Thermo-Density® exterior board, made from compressed bamboo strips. A special, unique heat-treatment process at 200°C provides MOSO® Bamboo X-treme® the highest durability class possible in the appropriate EU norms, increases the stability and density, and consequently the hardness. Furthermore, contrary to other wood products, this material achieves fire resistance Class B-s1-d0 (EN 13501-1) without impregnation with expensive and eco-damaging fire retardants. Bamboo X-treme® Cladding is available in 3 shapes: a rebated profile for installation with fasteners (18 mm) and screws, closed profile for 'invisible' screw installation and the trapezium profile for installation with screws. Like any untreated tropical hardwood species, when exposed to outdoor conditions, MOSO® Bamboo X-treme® will turn grey over time creating a very natural look.

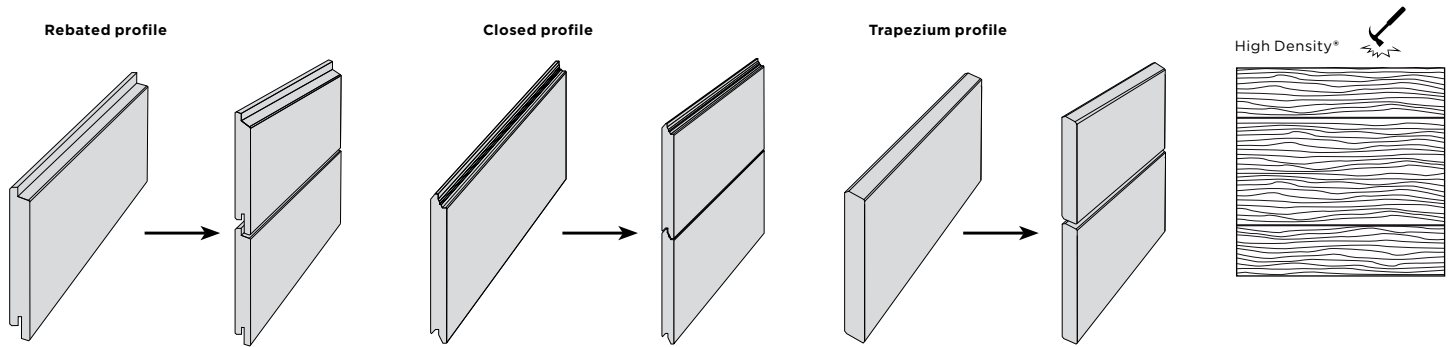

B: Bevel (also on ends), F: Flat.

Product Code	Shape	Finish	Edges	Surface	End-matched	Effective width (mm)*	Dimensions (mm)
BO-DTHT500G	Rebated profile	-	B	F	Yes	125	1850x137x18
BO-DTHT510	Trapezium profile	-	B	F	Yes	132	1850x137x18
BO-DTHT530	Closed profile	-	B	F	Yes	124.5	1850x137x18
BO-DTHT505G	Rebated profile	-	B	F	Yes	63	1850x75x18
BO-DTHT515	Trapezium profile	-	B	F	Yes	70	1850x75x18
BO-DTHT525	Trapezium profile	-	B	F	No	70	1850x75x12

* Effective width without distance between the boards, recommended distance 6 mm.

installation


- Full version available on www.moso-bamboo.com/x-treme.
- MOSO warrants the bamboo material and the mounting materials (fastener/screw) it supplies but does not warrantee the connection with other materials (such as sub frame joist/battens). It is the responsibility of the installer to make sure the used screw matches such materials during the full lifetime of the product.

technical characteristics and certifications

- Density: +/- 1150 kg/m³
- Dimensional stability: length: + 0.1%; width: + 0.9% (24 hours in water 20°C)
- Resistance to Indentation - Brinell Hardness: ≥ 9.5 kg/mm² (EN 1534)
- Reaction to fire: Class B-s1-d0 (EN 13501-1)¹⁾
- Flame spread index: Class A (ASTM E84)
- Thermal emittance: 0.81 (ASTM C1371)²⁾
- Solar Reflectance (SR): 0.32 (ASTM C1549)²⁾
- Solar Reflectance Index (SRI): Low 27, Medium 30, High 33 (ASTM E1980)²⁾
- Modulus of Elasticity: 13565 N/mm² (mean value - EN 408)
- Breaking strength: 54.4 N/mm² (characteristic value - EN 408)
- Biological durability: Class 1 (EN 350 / CEN/TS 15083-2), simulated graveyard test / Class 1 (EN 350 / CEN/TS 15083-1)
- Effectiveness against Blue Stain: Class 0 (EN 152)
- Use Class: Class 4 (EN 335)
- CO₂ neutral: LCA report TU Delft (ISO 14040/44) (www.moso.eu/lca)
- Environmental Product Declaration - EPD (EN 15804) (www.moso.eu/epd)
- FSC®: Products available with FSC® certification on request.
- Contribution LEED BD+C - v4: MR 1, MR 2, MR 3 (FSC®), SS 7 v2009: MR 6, MR 7 (FSC®)
- Contribution BREEAM: MAT 1, MAT 3 (FSC®), MAT 5 (HD)
- Guarantee: 25 years

¹⁾ Tested on 18 mm thickness, without gaps between boards, with ventilation space behind boards.

²⁾ Tested on 3 years weathered MOSO® Bamboo X-treme®.

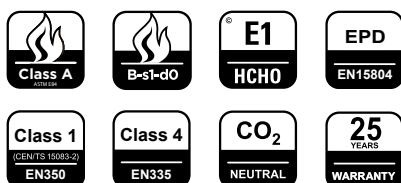

The mark of responsible forestry
FSC® C002063



breeam